

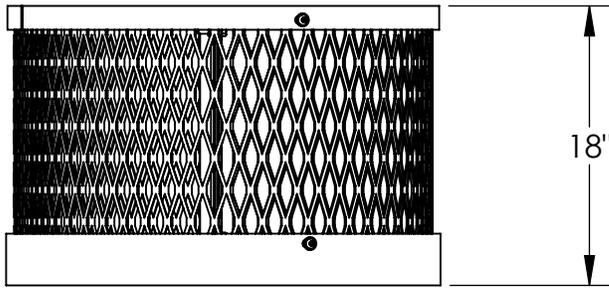


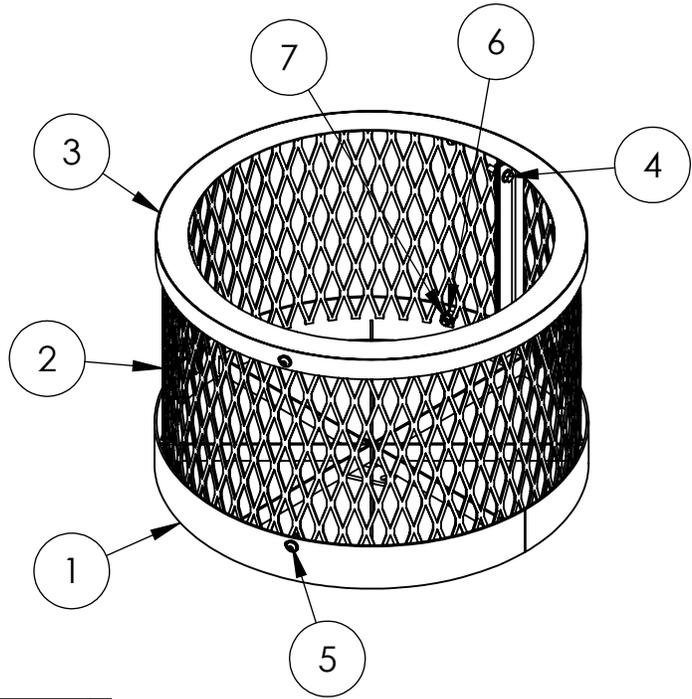

Ø 28"

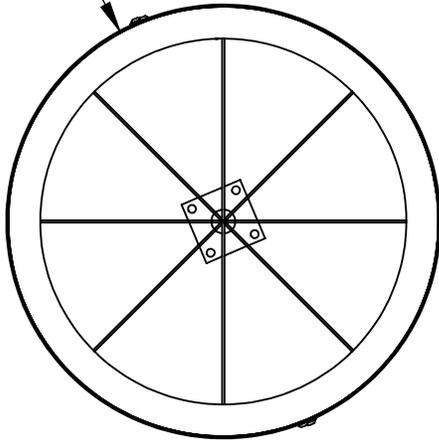

# PREMIER POLYSTEEL

The Best Commercial Outdoor Furniture Available. Period.



1. Drill out the holes in the side with a 7/16" dia. drill bit. Also drill out the holes in the side of the base and top.
2. Roll the side so that the angles at each end are on the inside of the tube. Two ratchet type load binders work well for this. Then bolt the ends together with the 1-1/2" long Hex Head Bolts.
3. If you are mounting the planter in place, drill out the four holes in the bottom plate of the base with a 7/16" dia. drill bit and fasten to the floor with the appropriate fasteners. Skip this step if the planter will be free standing.
4. Place the side into the base and align the holes on the side of the base with the openings in the expanded metal side. Use the 1-1/4" long Button Socket Cap Screws so fasten the base to the side.
5. Install the top ring to the side and align the holes on the side of the top ring with the openings in the expanded metal side. Use the 1-1/4" long Button Socket Cap Screw so fasten the top to the side.

In Accordance to California law: WARNING This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.			
1	653-106	Round Receptacle Base	1	Premier Polysteel		
2	653-741	Round Planter Side	1			
3	653-721	Round Planter Top	1			
4	516-058	3/8"x1-1/2" SS Hex Bolt	2	28" Round Expanded Metal Planter		
5	516-045	3/8"x1-1/4" SS Btn Skt Cap Screw	4			
6	516-023	3/8" SS Flat Washer	12			
7	516-028	3/8" SS Nylock Nut	6			
				SIZE <b>A</b>	DWG. NO. 9PL-102	REV. <b>A</b>
				SCALE:1:12	WEIGHT:	SHEET 1 OF 1